


CODE 72020
01-0466-002**BREADING MACHINE**
BRE04**Description:**

Ideal option to complement and streamline the production line of flat products, such as steaks and nuggets, ensuring greater productivity and quality for breaded products.

Stainless steel equipment with polished and sandblasted finish.

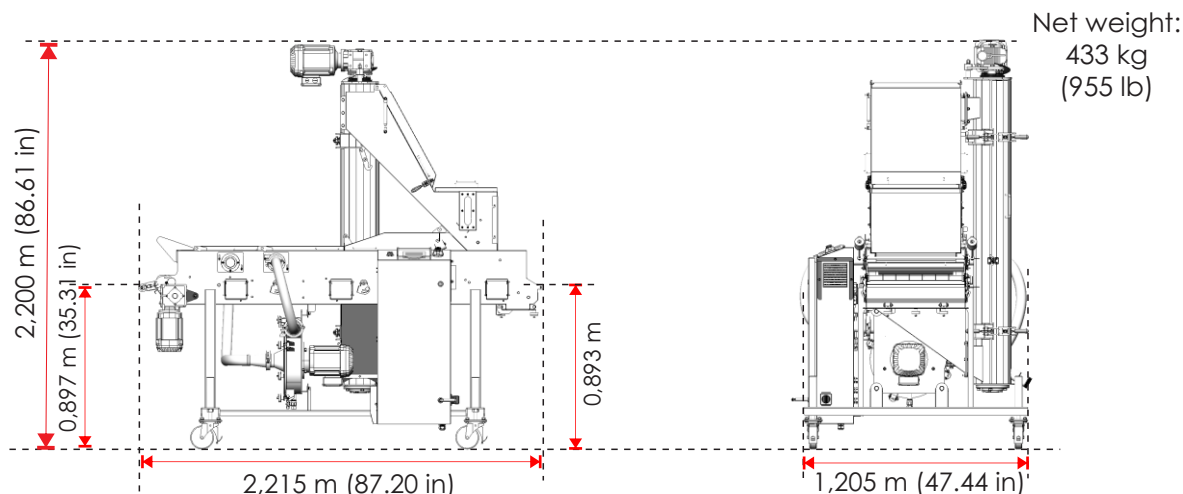

*Illustrative image

Transportation and logistics info:

Height: 1.394 m (54.88 in)
Width: 1.898 m (74,72 in)
Length: 2.398 m (94.41 in)

Gross weight: 633 kg
(1396 lb)

Motorization



Blower	1,5 kW 2P	2,55 A
Flour Elevator	1,5 kW 4P	2,9 A
Belt	0,55 kW 4P	1,1 A

Product size:

Designed for flat products, such as steaks, nuggets, hamburgers, etc., with a considerable variation in product weight.

Flour

Amount: 25 to 27 kg (55 to 60 lb) depending on the granulometry of the flour.
Type: industrialized.
Important: BRE04 does not work with artisanal flour (bread roll flour), as it can normally contain sweet bread and milk bread, which makes the flour oily.
During the frying process, this mixture of artisanal flour breads can produce black dots in the savory, which are the result of caramelization and burning of the sugar before the savory snack browns completely.

Blower/ fan	Remove excess breadding flour												
Belt width	510 mm (20.08 in)												
Electrical data: 480 V - THREE PHASE	<table><tr><th>Electric Consumption</th><th>Total current</th><th>Gauge or phase</th><th>Gauge the ground *</th><th>Plug</th><th>Exclusive circuit breaker</th></tr><tr><td>4.0 kW</td><td>10 A</td><td>4 mm²</td><td>4 mm²</td><td>pp 3x4 mm² cable</td><td>Three polar 16 A</td></tr></table> <p>*.The MCI breadding be installed with suitable electrical grounding. Failure to elctrical grounding may cause electric damages. For your safety, ask for an electrician youtrust to check the condition of the power grid of the equipment installation site.</p>	Electric Consumption	Total current	Gauge or phase	Gauge the ground *	Plug	Exclusive circuit breaker	4.0 kW	10 A	4 mm ²	4 mm ²	pp 3x4 mm ² cable	Three polar 16 A
Electric Consumption	Total current	Gauge or phase	Gauge the ground *	Plug	Exclusive circuit breaker								
4.0 kW	10 A	4 mm ²	4 mm ²	pp 3x4 mm ² cable	Three polar 16 A								
Electrical panel:	<div><div>Activates the conveyor movement command</div><div>Activate the flour elevator</div><div>Activate the blower</div></div> <div><div><div>FLOUR CONVEYOR</div><div>0</div></div><div><div>FLOUR ELEVATOR</div><div>0</div></div><div><div>FLOUR BLOWER</div></div><div><div>MCI</div><div></div><div></div><div><div>-</div><div>+</div></div></div></div>												