


CODE 72081

01-0468-001

BREADING MACHINE
BAT04


Description:

Ideal option to complement and streamline your production line of flat products, ensuring greater productivity and quality for your breaded products.
 It has a blower that removes excess breading liquid.
 Stainless steel equipment with polished and sandblasted finish.

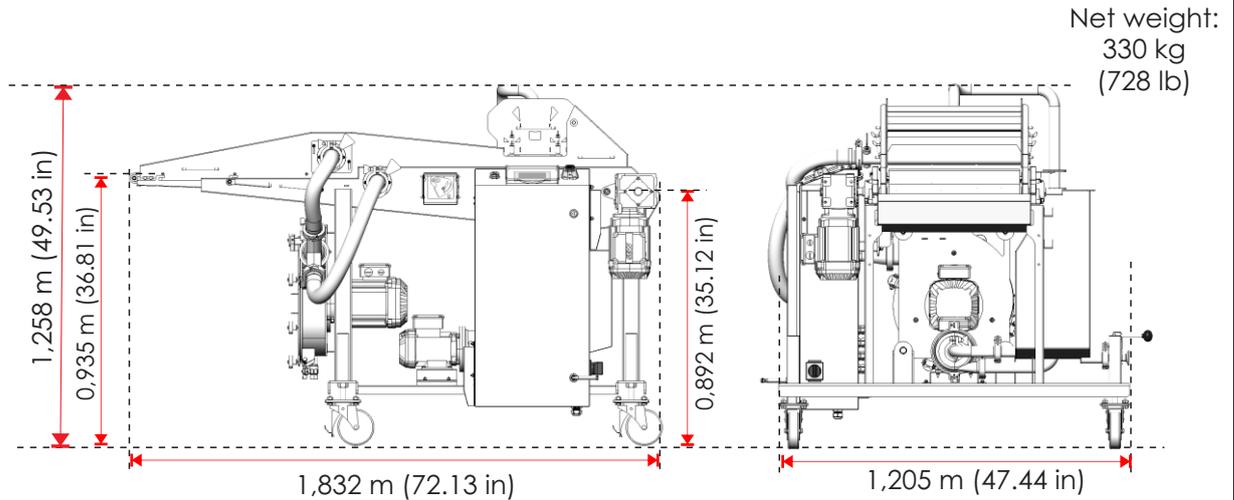

*Illustrative image

Transportation and logistics info:	Height: 1.444 m (56.85 in) Width: 1.348 m (53.07 in) Length: 2.248 m (88.50 in)	Gross weight: 473 kg (1043 lb)									
Motorization	<table border="1"> <tr> <td>Blower</td> <td>1,5 kW 2P</td> <td>2,55 A</td> </tr> <tr> <td>Pump</td> <td>1,5 kW 4P</td> <td>2,55 A</td> </tr> <tr> <td>Conveyor</td> <td>0,55 kW 4P</td> <td>1,10 A</td> </tr> </table>	Blower	1,5 kW 2P	2,55 A	Pump	1,5 kW 4P	2,55 A	Conveyor	0,55 kW 4P	1,10 A	
Blower	1,5 kW 2P	2,55 A									
Pump	1,5 kW 4P	2,55 A									
Conveyor	0,55 kW 4P	1,10 A									
Product size:	Designed for flat products, such as steaks, nuggets, hamburgers, etc., with a considerable variation in product weight.										
Breading liquid:	Volume: about 25 liters (depending on the viscosity of the liquid) Type: Not recommended to use egg white										
Breading system:	For liquid waterfall										
Liquid recirculation	Sanitary pump - BL30 304										

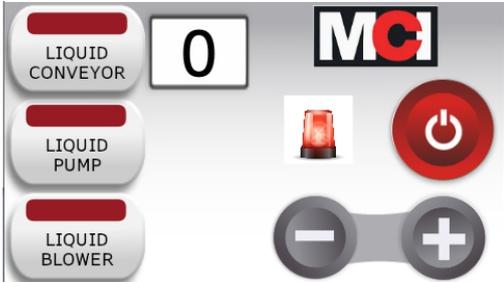Blower/ fan	Remove excess breading flour																	
Belt width	449 mm (17.68 in)																	
<p>Electrical data:</p> <p>480 V - THREE PHASE</p>	<table border="1"> <thead> <tr> <th>Electric Consumption</th> <th>Total current</th> <th>Gauge or phase</th> <th>Gauge the ground *</th> <th>Plug</th> <th>Exclusive circuit breaker</th> </tr> </thead> <tbody> <tr> <td>3.7 kW</td> <td>11.4 A</td> <td>4 mm²</td> <td>4 mm²</td> <td>doesn't have</td> <td>Three polar 16 A</td> </tr> </tbody> </table>	Electric Consumption	Total current	Gauge or phase	Gauge the ground *	Plug	Exclusive circuit breaker	3.7 kW	11.4 A	4 mm ²	4 mm ²	doesn't have	Three polar 16 A					
Electric Consumption	Total current	Gauge or phase	Gauge the ground *	Plug	Exclusive circuit breaker													
3.7 kW	11.4 A	4 mm ²	4 mm ²	doesn't have	Three polar 16 A													
<p>*.The MCI breading be installed with suitable electrical grounding. Failure to elctrical grounding may cause electric damages. For your safety, ask for an electrician youtrust to check the condition of the power grid of the equipment installation site.</p>																		
Electrical panel:	 <div style="display: flex; align-items: flex-start;"> <div style="margin-right: 20px;"> <p>Activates the conveyor movement command</p> <p>Activates the centrifugal pump</p> <p>Activate the blower</p> </div>  </div>																	